

◆ **Model No:** ASDFD000C-1601

- 10mm Transducer Frame.
- 3.6Voice Coil DCCA.
- 06PEEKOA.

◆ **Transducer front and side images:**



◆ **Specifications:**


**Features:**

Transducer	10CY-16Ω
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 10mm PC
YOKE	Ø 8.4mm SPCC/CR3
Magnet	Ø 8.3mm NdFeB-N40
Washer (T-Plater)	Ø 8.4mm SPCC/CR3
PCB	Ø 8.8*5.8mm FR4
Diaphragm	Ø 8.9mm PEEKOA+06u
Voice Coil	Ø 3.6mm DCCA
Grill Cover	NON
Mesh	550mesh

**Transducers Properties:**

Transducer	Ø 10mm
D.C.R.	16 ± 15%Ω
Sensitivity	106 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~10KHz) ≤ 3%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

## ◆ S. P. L Curve:

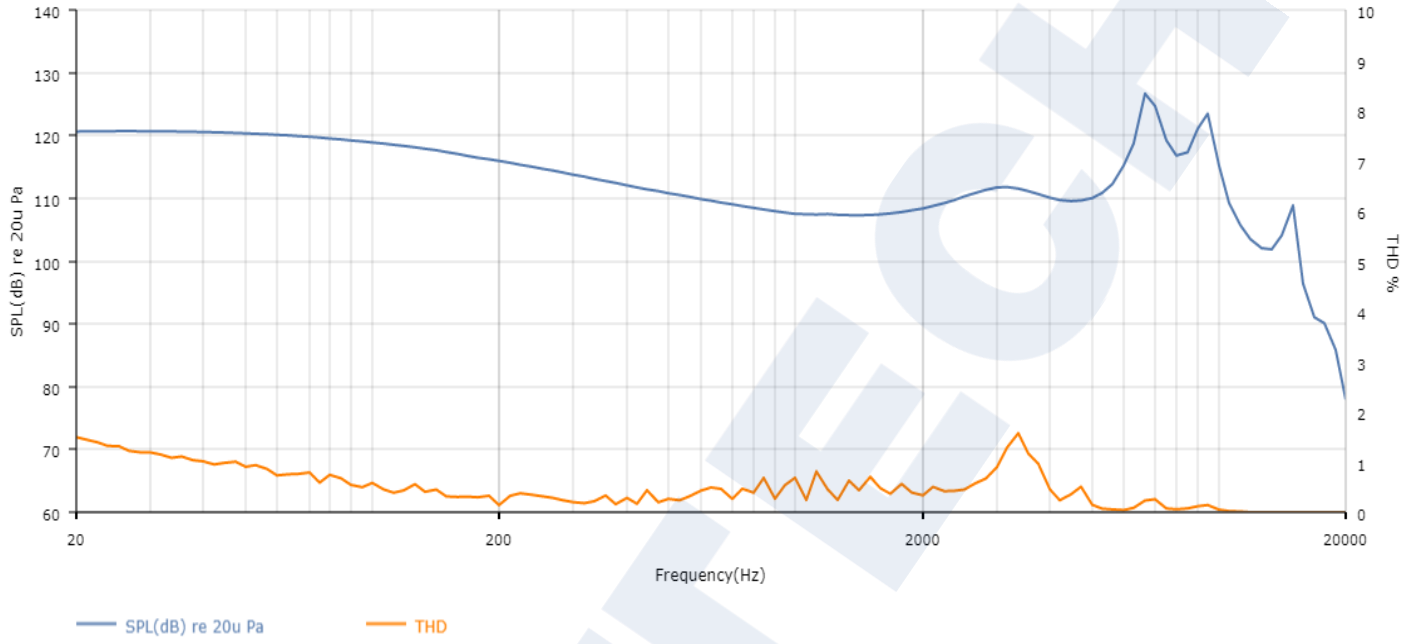

## ◆ Transducer front and side images:

