


- ◆ **Model No:** ASDFD000C-2700
 - 12mm Transducer Frame.
 - 6.6mm Voice Coil SDHT.
 - 3.5 μ TPU+16 μ PEN Nickel plating.
- ◆ **Transducer front and side images:**



◆ Specifications:


Features:

Transducer	12CY-27.0Q
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 12mm PC
YOKE	Ø 8.0mm SPCC/CR3
Magnet	Ø 6mm NdFeB-N38
Washer (T-Plater)	Ø 6.2mm SPCC/CR3
PCB	SPCC injection molding machine
Diaphragm	Ø 12mm Tpu+PEN+16u
Voice Coil	Ø 6.6mm SDHT
Grill Cover	NON
Mesh	Black Satti

Transducers Properties:

Transducer	Ø 12mm
D.C.R.	32 ± 15%Ω
Sensitivity	104 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (100~20KHz) ≤1%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

◆ S. P. L Curve:

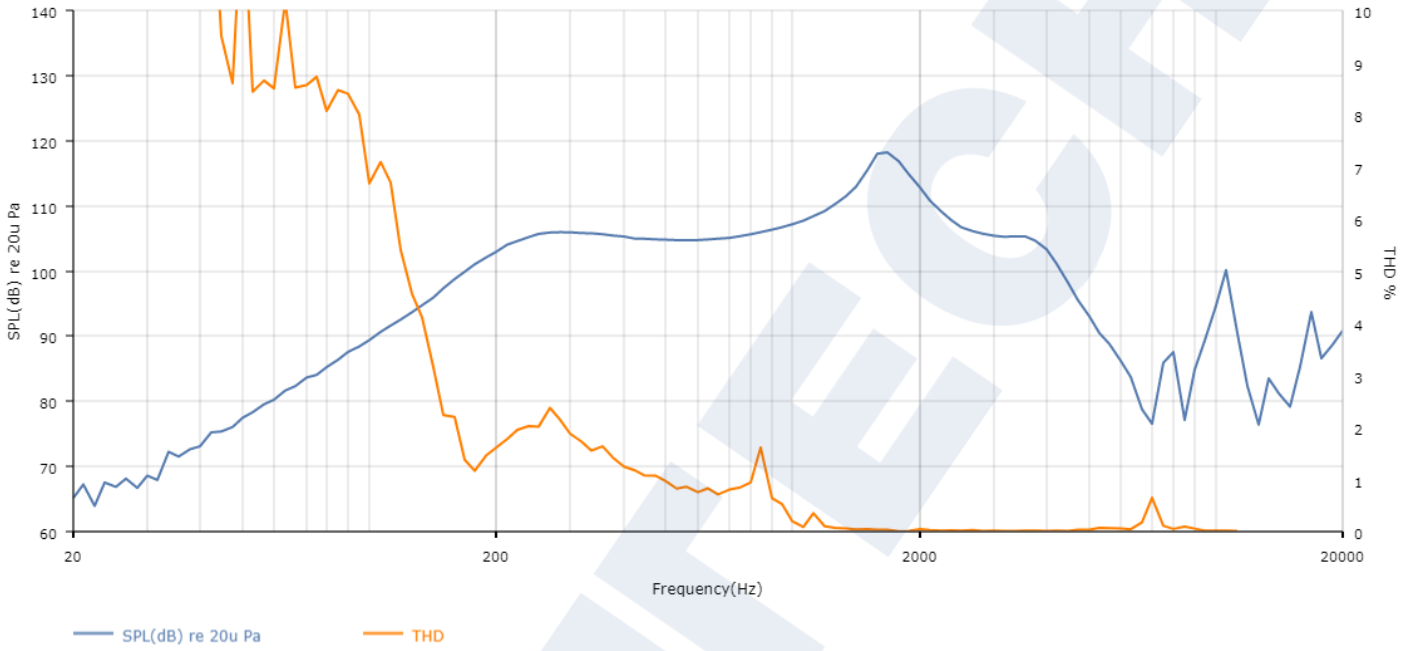

◆ Transducer front and side images:

