


◆ **Model No:**ASDFD000E-3800

- 16.2mm Transducer Frame.
- 7.4mm Voice Coil DCCA.
- 9μPET.

◆ **Transducer front and side images:**

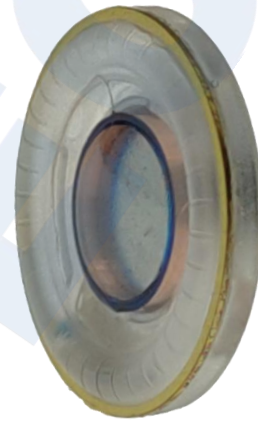

◆ **Specifications:**


Features:

Transducer	16.2CY-38.0Ω
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 16.2mm
YOKE	Ø 6.8mm SPCC/CR3
Magnet	Ø 6.7mm NdFeB-N42
Washer (T-Plater)	Ø 9.15mm SPCC/CR3
PCB	Ø 4.4*2.0mm FR4
Diaphragm	Ø 16.2mm 9uPET
Voice Coil	Ø 7.4mm DCCA
Grill Cover	NON
Mesh	NON

Transducers Properties:

Transducer	Ø 16.2mm
D.C.R.	38 ±15%Ω
Sensitivity	121±3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (100~6KHz) ≤5%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

◆ S. P. L Curve:

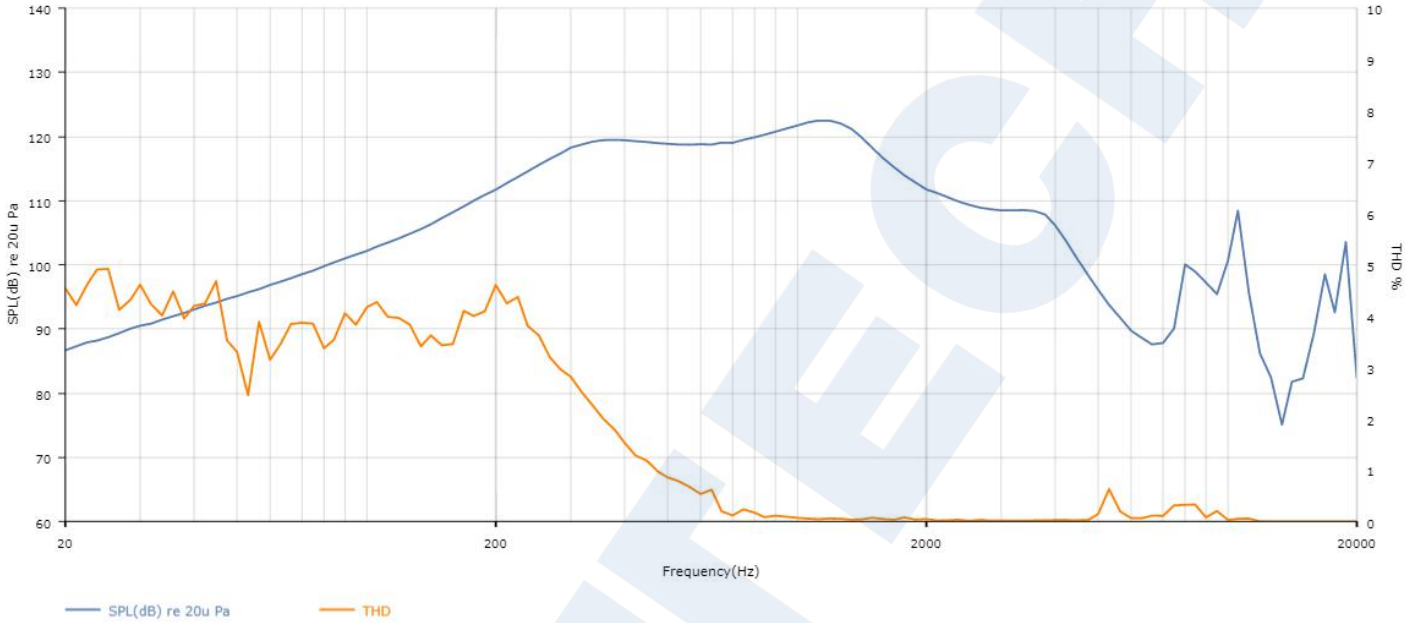

◆ Transducer front and side images:

