

◆ **Model No.** ASDFD0301-1400

- 9mm Transducer Frame.
- 4.3mm Voice Coil DCCA.
- 6μ(MX) Diaphragm.

◆ **Transducer front and side images:**



◆ **Specifications:**


**Features:**

Transducer	9CY-16.0Ω-06A+C-(MX)
Insert Molding	NON
Injection Basket/Yoke	NON
YOKE	Ø 8.6mmSPCC/CR3
Magnet	Ø 3mmNdFeB-N38
Washer (T-Plater)	Ø 3.8mm SPCC/CR3
PCB	Ø 5mm FR4
Diaphragm	Ø 8.55mm(MX)
Voice Coil	Ø 4.3mmDCCA
Grill Cover	Ø 9mm SUS
Mesh	NBC 4.19*1.28*0.3/3M9448

**Transducers Properties:**

Transducer	Ø 9mm
D.C.R.	16 ± 15%Ω
Sensitivity	95 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~6KHz) ≤ 5%
Rated Input Power	3mW
Max Input Power	5mW
Buzz and Rattles	Shall Be Rated Input Power 3mW Program Source Or Sine Wave

◆ *S. P. L Curve:*

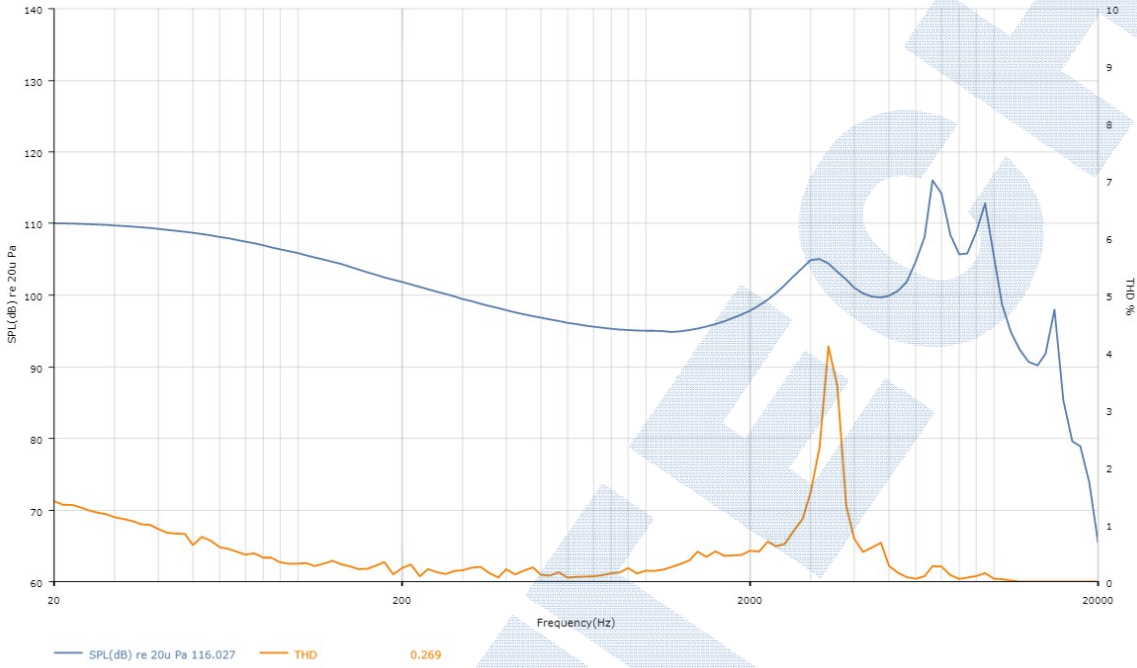

◆ *Transducer front and side images:*

