

● *Compact model: FSA010815-0300*

This 1.5 inch compact Fullrange driver slim design features an 0.8 inch voice coil, 4 layers CCAW, and a black anodized Aluminum cone along with anodized Aluminum center cap. It contains dual Neodymium magnet motor system which provides maximum flux in a compact package. The voice coil former vented hole so as to reduce air compression effects.

● *Transducer front and side images:*



● *Specifications:*

T-S Parameters

Resonance frequency [fs]	178 Hz
Mechanical Q factor [Qms]	7.212
Electrical Q factor [Qes]	0.548
Total Q factor [Qts]	0.509
Force factor [Bl]	3.016 Tm
Mechanical resistance [Rms]	0.282 kg/s
Moving mass [Mms]	1.817 g
Compliance [Cms]	0.439 mm/N
Effective diaph. diameter [D]	33 mm
Effective piston area [Sd]	8.55 cm ²
Equivalent volume [Vas]	0.046 l
Sensitivity (2.83V/1m)	83 dB
Ratio Bl/√Re	1.93 N/√W
Ratio fs/Qts	350 Hz

Electrical Data

Nominal impedance [Zn]	3 Ω
Minimum impedance [Zmin]	2.756 Ω
Maximum impedance [Zo]	21.375 Ω
DC resistance [Re]	2.45 Ω
Voice coil inductance [Le]	0.108 mH


Power Handling

100h RMS noise test (IEC 18.4)	8 W
Long-term max power (IEC 18.2)	- W

Voice Coil & Magnet Data

Voice coil diameter	20.32 mm
Voice coil height	4.4 mm
Voice coil layers	4
Height of gap	1.5 mm
Linear excursion	± 1.45 mm
Max mech. excursion	± - mm
Unit weight	0.055 kg

Frequency Response / Impedance Curve:

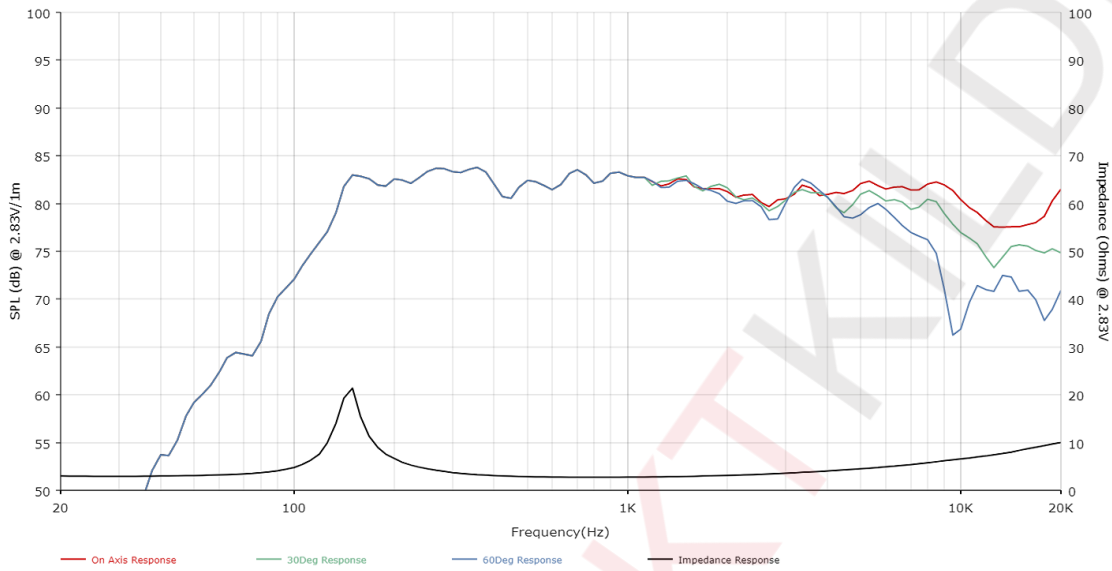

Transducer front and side images:

