


2", Steel Frame
0.6" CCAW Voice Coil, Kapton Former
Paper Cone, Rubber Surround
Wide Frequency Range
Dual Ferrite Magnet Motor System
Mylar Cap

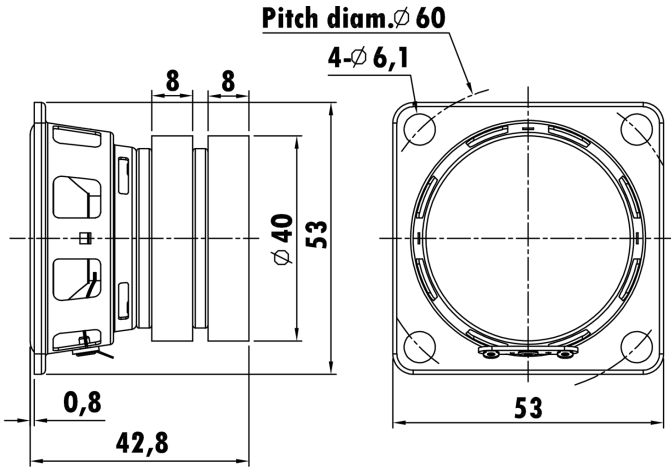

T-S Parameters

Resonance frequency [fs]	150 Hz
Mechanical Q factor [Qms]	11.37
Electrical Q factor [Qes]	1.75
Total Q factor [Qts]	1.52
Force factor [Bl]	2.00 Tm
Mechanical resistance [Rms]	0.119 kg/s
Moving mass [Mms]	1.31 g
Compliance [Cms]	0.72 mm/N
Effective diaph. diameter [D]	40 mm
Effective piston area [Sd]	12.57 cm ²
Equivalent volume [Vas]	0.165 l
Sensitivity (2.83V/1m)	78 dB
Ratio Bl/√Re	0.87 N/√W
Ratio fs/Qts	98.68 Hz

Electrical Data

Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	5.4 Ω
Maximum impedance [Zo]	25 Ω
DC resistance [Re]	5.2 Ω
Voice coil inductance [Le]	0.12 mH

Power Handling

100h RMS noise test (IEC 17.1)	5 W
Long-term max power (IEC 17.3)	- W

Voice Coil & Magnet Data

Voice coil diameter	16.4 mm
Voice coil height	5.2 mm
Voice coil layers	2
Height of gap	3 mm
Linear excursion	± 1.1 mm
Max mech. excursion	± - mm
Unit weight	0.160 kg

