

◆ *Model No:FSBB10040-0B12*

- 40mm Transducer Frame.
- 16.28mm Voice Coil DCCA.
- 25μPEEK.

◆ *Transducer front and side images:*



◆ *Specifications:*


Features:

Transducer	40CY-32.0Ω
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 44.4mm PC
YOKE	Ø 20.9mm SPCC/CR3
Magnet	Ø 15.4mm NdFeB-N35
Washer (T-Plater)	Ø 15.5mm SPCC/CR3
PCB	16.5*3.5*0.6mm FR4
Diaphragm	Ø 38mm PEEK+25u
Voice Coil	Ø 16.28mm CCAW
Grill Cover	NON
Mesh	Non-WovenY2White

Transducers Properties:

Transducer	Ø 40mm
D.C.R.	32 ± 15%Ω
Sensitivity	120 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~8KHz) ≤ 5%
Rated Input Power	20mW
Max Input Power	30mW
Buzz and Rattles	Shall Be Rated Input Power 20mW Program Source Or Sine Wave

◆ S. P. L Curve:

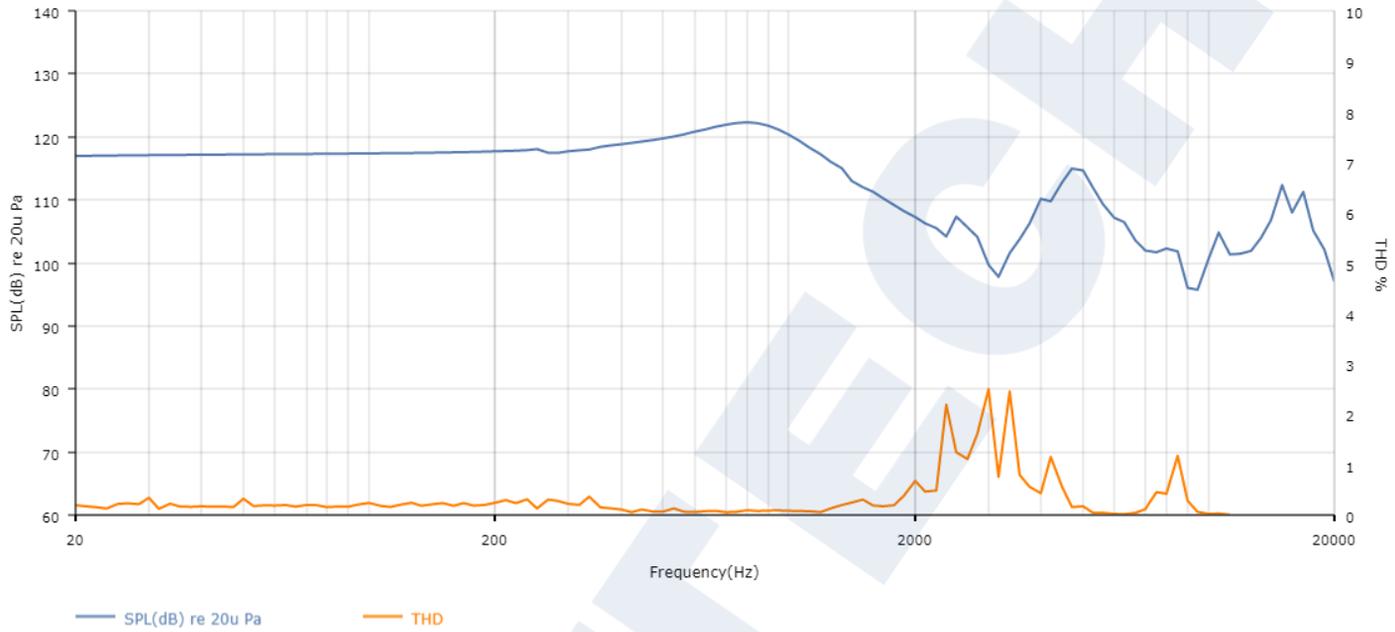

◆ Transducer front and side images:

