

◆ *Model No:* FSBB10040-0B13

- 40mm Transducer Frame.
- 20.4mm CCAW Voice Coil
- 10u PU++9u PEEK+0.075AZM

◆ *Transducer front and side images:*



◆ *Specifications:*


Features:

Transducer	40CY
Insert Molding	Molding PC
Injection Basket/Yoke	Ø 40mm PC
YOKE	Ø 23.7mm SPCC/CR3
Magnet	Ø 19.2mm NdFeB-N42
Washer (T-Plater)	Ø 19.3mm SPCC/CR3
PCB	Ø 39*0.3mm FR4
Diaphragm	Ø 38.75mm PEEK
Voice Coil	CCAW
Grill Cover	NON
Mesh	Non-Woven White

Transducers Properties:

Transducer	Ø 40mm
D.C.R.	32 ± 15%Ω
Sensitivity	126 ± 3dB (at 1KHz 1mW)
Frequency Response	20~20KHZ
Distortion	THD (50~10KHz) ≤3%
Rated Input Power	30mW
Max Input Power	50mW
Buzz and Rattles	Shall Be Rated Input Power 50mW Program Source Or Sine Wave

◆ S. P. L Curve:

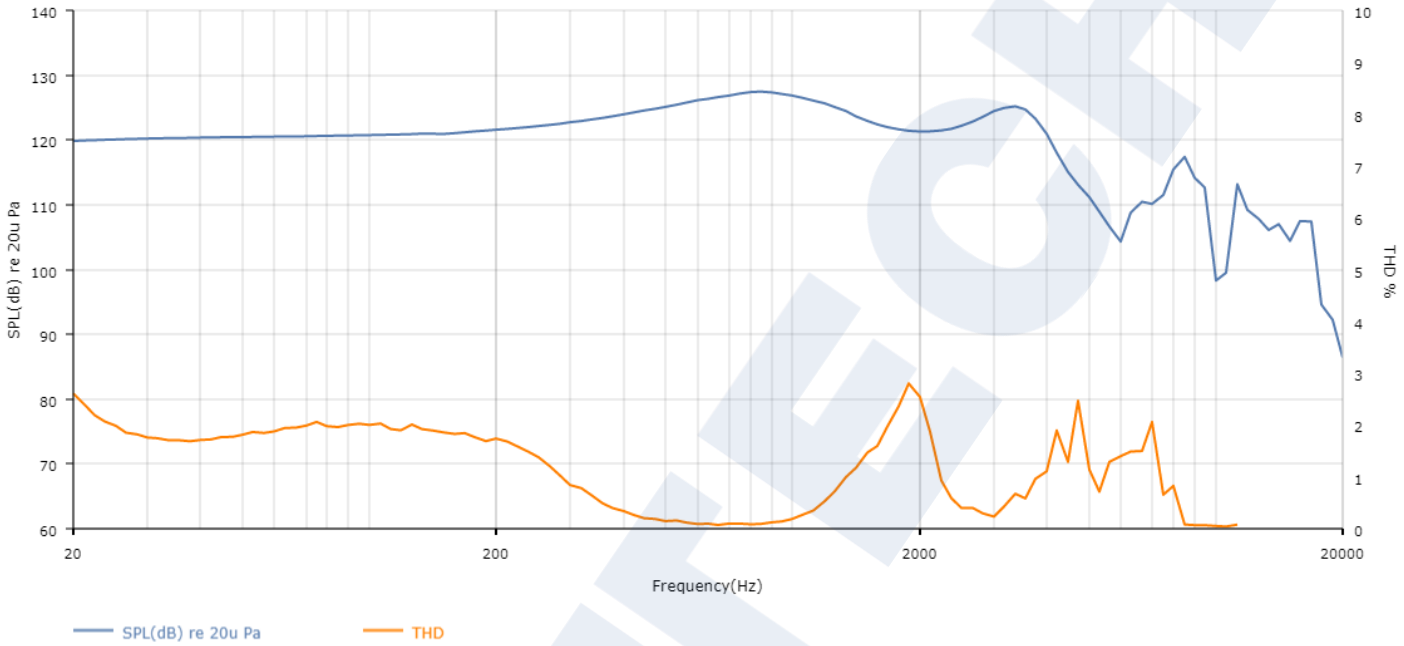

◆ Transducer front and side images:

