


6.5", Steel Frame
1.2" PESVW Voice Coil, Aluminum Former
Paper Cone, Rubber Surround
Dual Ferrite Magnet Motor System
High Sensitivity
Power Handling with Low pass filter -12dB/OCT 180Hz

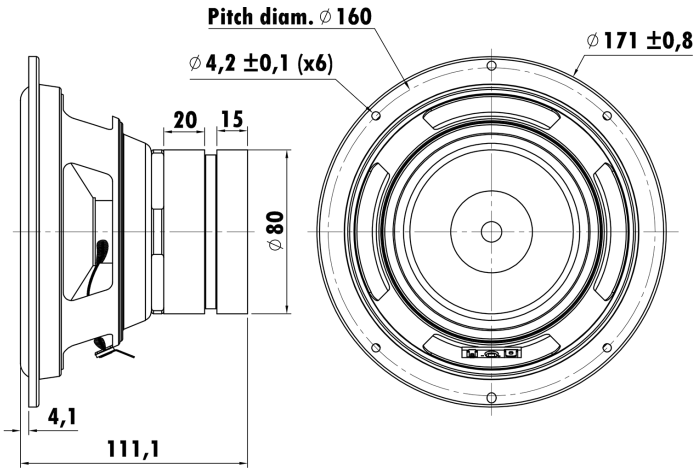

T-S Parameters

Resonance frequency [fs]	51 Hz
Mechanical Q factor [Qms]	5.23
Electrical Q factor [Qes]	0.76
Total Q factor [Qts]	0.66
Force factor [Bl]	7.27 Tm
Mechanical resistance [Rms]	2.23 kg/s
Moving mass [Mms]	36.12 g
Compliance [Cms]	0.26 mm/N
Effective diaph. diameter [D]	135 mm
Effective piston area [Sd]	132.7 cm ²
Equivalent volume [Vas]	6.58 l
Sensitivity (2.83V/1m)	88 dB
Ratio Bl/√Re	3.95 N/√W
Ratio fs/Qts	78 Hz

Electrical Data

Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	3.7 Ω
Maximum impedance [Zo]	23 Ω
DC resistance [Re]	3.4 Ω
Voice coil inductance [Le]	1.07 mH

Power Handling

100h RMS noise test (IEC 18.4)	100 W
Long-term max power (IEC 18.2)	W

Voice Coil & Magnet Data

Voice coil diameter	30.5 mm
Voice coil height	13.5 mm
Voice coil layers	4
Height of gap	6 mm
Linear excursion	± 3.75 mm
Max mech. excursion	± 15 mm
Unit weight	1.3 kg

