

Datasheet updated: 28-05-2021

### $\bigcirc$ Woofer model: AUGWL2001-JN01

This 4 inch Woofer, features 1 inch voice coil with Conex spider, newly designed aluminum cone with ferrite magnet motor system. This woofer offers natural and detailed sound experience with low distortion. It is the new audio standard for DIY enthusiasms or home theater systems.

#### $\bigcirc$ Transducer front and side images:



#### ۲ Specifications:

### **T-S Parameters**

Resonance frequency [fs]	60.7 Hz
Mechanical Q factor [Qms]	3.85
Electrical Q factor [Qes]	0.51
Total Q factor [Qts]	0.45
Force factor [BI]	4.13 Tm
Mechanical resistance [Rms]	0.69 kg/s
Moving mass [Mms]	6.99 g
Compliance [Cms]	0.99 mm/N
Effective diaph. diameter [D]	82 mm
Effective piston area [Sd]	52.81 cm²
Equivalent volume [Vas]	3.90 l
Sensitivity (2.83V/1m)	87 dB
Ratio BI/√Re	2.28 N/√W
Ratio fs/Qts	134.9 Hz

### Electrical Data

Nominal impedance [Zn]	4 Ω	Voice coil di
Minimum impedance [Zmin]	3.8 Ω	Voice coil he
Maximum impedance [Zo]	21.7 Ω	Voice coil la
DC resistance [Re]	3.28 Ω	Height of ga
Voice coil inductance [Le]	0.104 mH	Linear excu
		Max mech.
5		Unit weight

## Power Handling

100h RMS noise test (IEC 18.4)	35 W
Long-term max power (IEC 18.2)	- W

### Voice Coil & Magnet Data


Voice coil diameter	25.5 mm
Voice coil height	12.5 mm
Voice coil layers	2
Height of gap	6 mm
Linear excursion	± 3.25 mm
Max mech. excursion	± 11 mm
Unit weight	0.93 kg

## EASTRECH




Datasheet updated: 28-05-2021

# • Frequency Response / Impedance Curve:

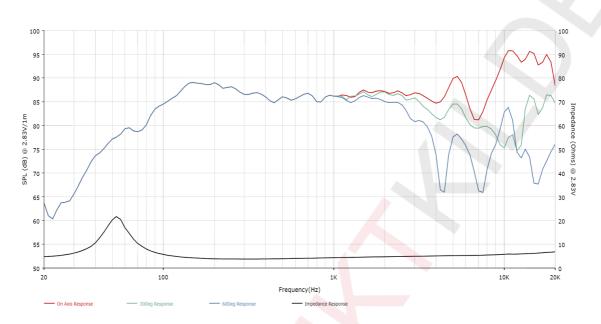

## • Transducer front and side images:

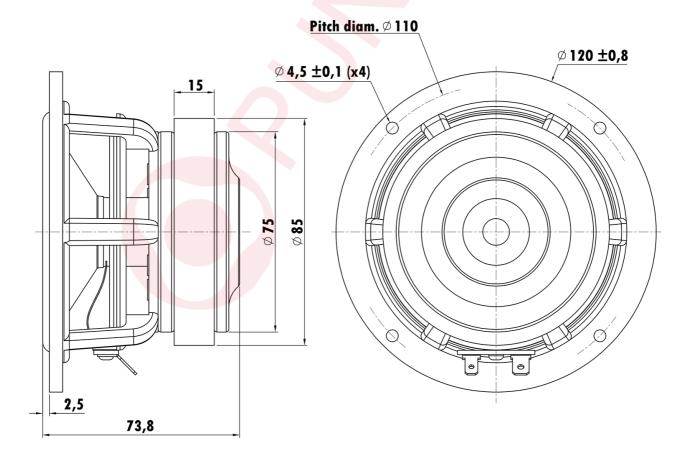

# EAS1[ECH