

● *Woofer model: FSISD1550-0401*

This 5.25 inch 4 ohm Woofer driver, with the black anodized Aluminium cone. A dual suspension(patented) driver, with elimination of the limits from traditional single suspension driver, resulted in more diverse and slim design. The voice coil former and pole piece are vented holes so as to reduce air compression under high excursion condition.

● *Transducer front and side images:*



● *Specifications:*

T-S Parameters

Resonance frequency [fs]	75 Hz
Mechanical Q factor [Qms]	4.488
Electrical Q factor [Qes]	0.573
Total Q factor [Qts]	0.508
Force factor [Bl]	6.807 Tm
Mechanical resistance [Rms]	1.695 kg/s
Moving mass [Mms]	16.453 g
Compliance [Cms]	0.284 mm/N
Effective diaph. diameter [D]	107.7 mm
Effective piston area [Sd]	91.1 cm ²
Equivalent volume [Vas]	3.338 l
Sensitivity (2.83V/1m)	85 dB
Ratio Bl/√Re	3.644 N/√W
Ratio fs/Qts	144.88 Hz

Electrical Data

Nominal impedance [Zn]	4 Ω
Minimum impedance [Zmin]	3.9 Ω
Maximum impedance [Zo]	20.72 Ω
DC resistance [Re]	3.49 Ω
Voice coil inductance [Le]	0.712 mH


Power Handling

100h RMS noise test (IEC 18.4)	15 W
Long-term max power (IEC 18.2)	20 W

Voice Coil & Magnet Data

Voice coil diameter	25.4 mm
Voice coil height	12.9 mm
Voice coil layers	4
Height of gap	6 mm
Linear excursion	± 3.45 mm
Max mech. excursion	± - mm
Unit weight	0.650 kg

Frequency Response / Impedance Curve:

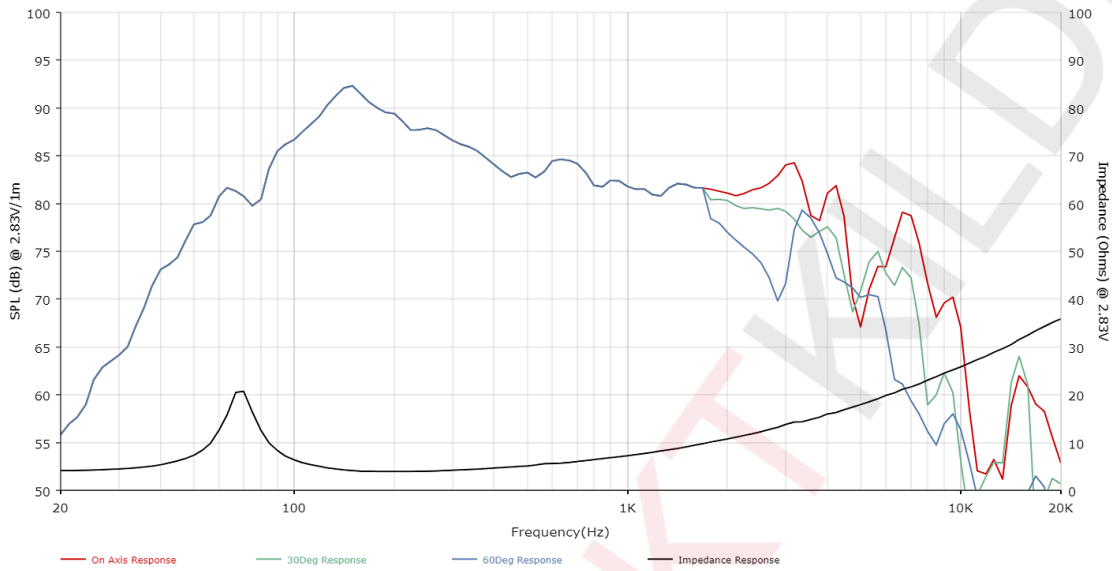

Transducer front and side images:

